



PCB PN: 065-0481

REVISIONS				
SYM	ACT#	DESCRIPTION	APP	DATE
C		RELEASE TO PRODUCTION		
D	99-007	CHANGE R73=330;R93,82=10K;R89=316K;R10=10.7K C9,10,11,12=0.1uF;R83=51.1K & ADDED C92=.1uF	WAS	1/11/99
E	99-008	STRENGTHEN DESIGN	WAS	1/8/99
F	99-012	CHANGE R129=1.5K; C60=0.01uF; ADDED J13	WAS	1/14/99
G	99-042	R97,R99,R100,R108,R112,R116 = 51.1K; R21 = 220K; R83 = 33K	WAS	1/14/99
H	99-045	R107 = 100k		3/9/99

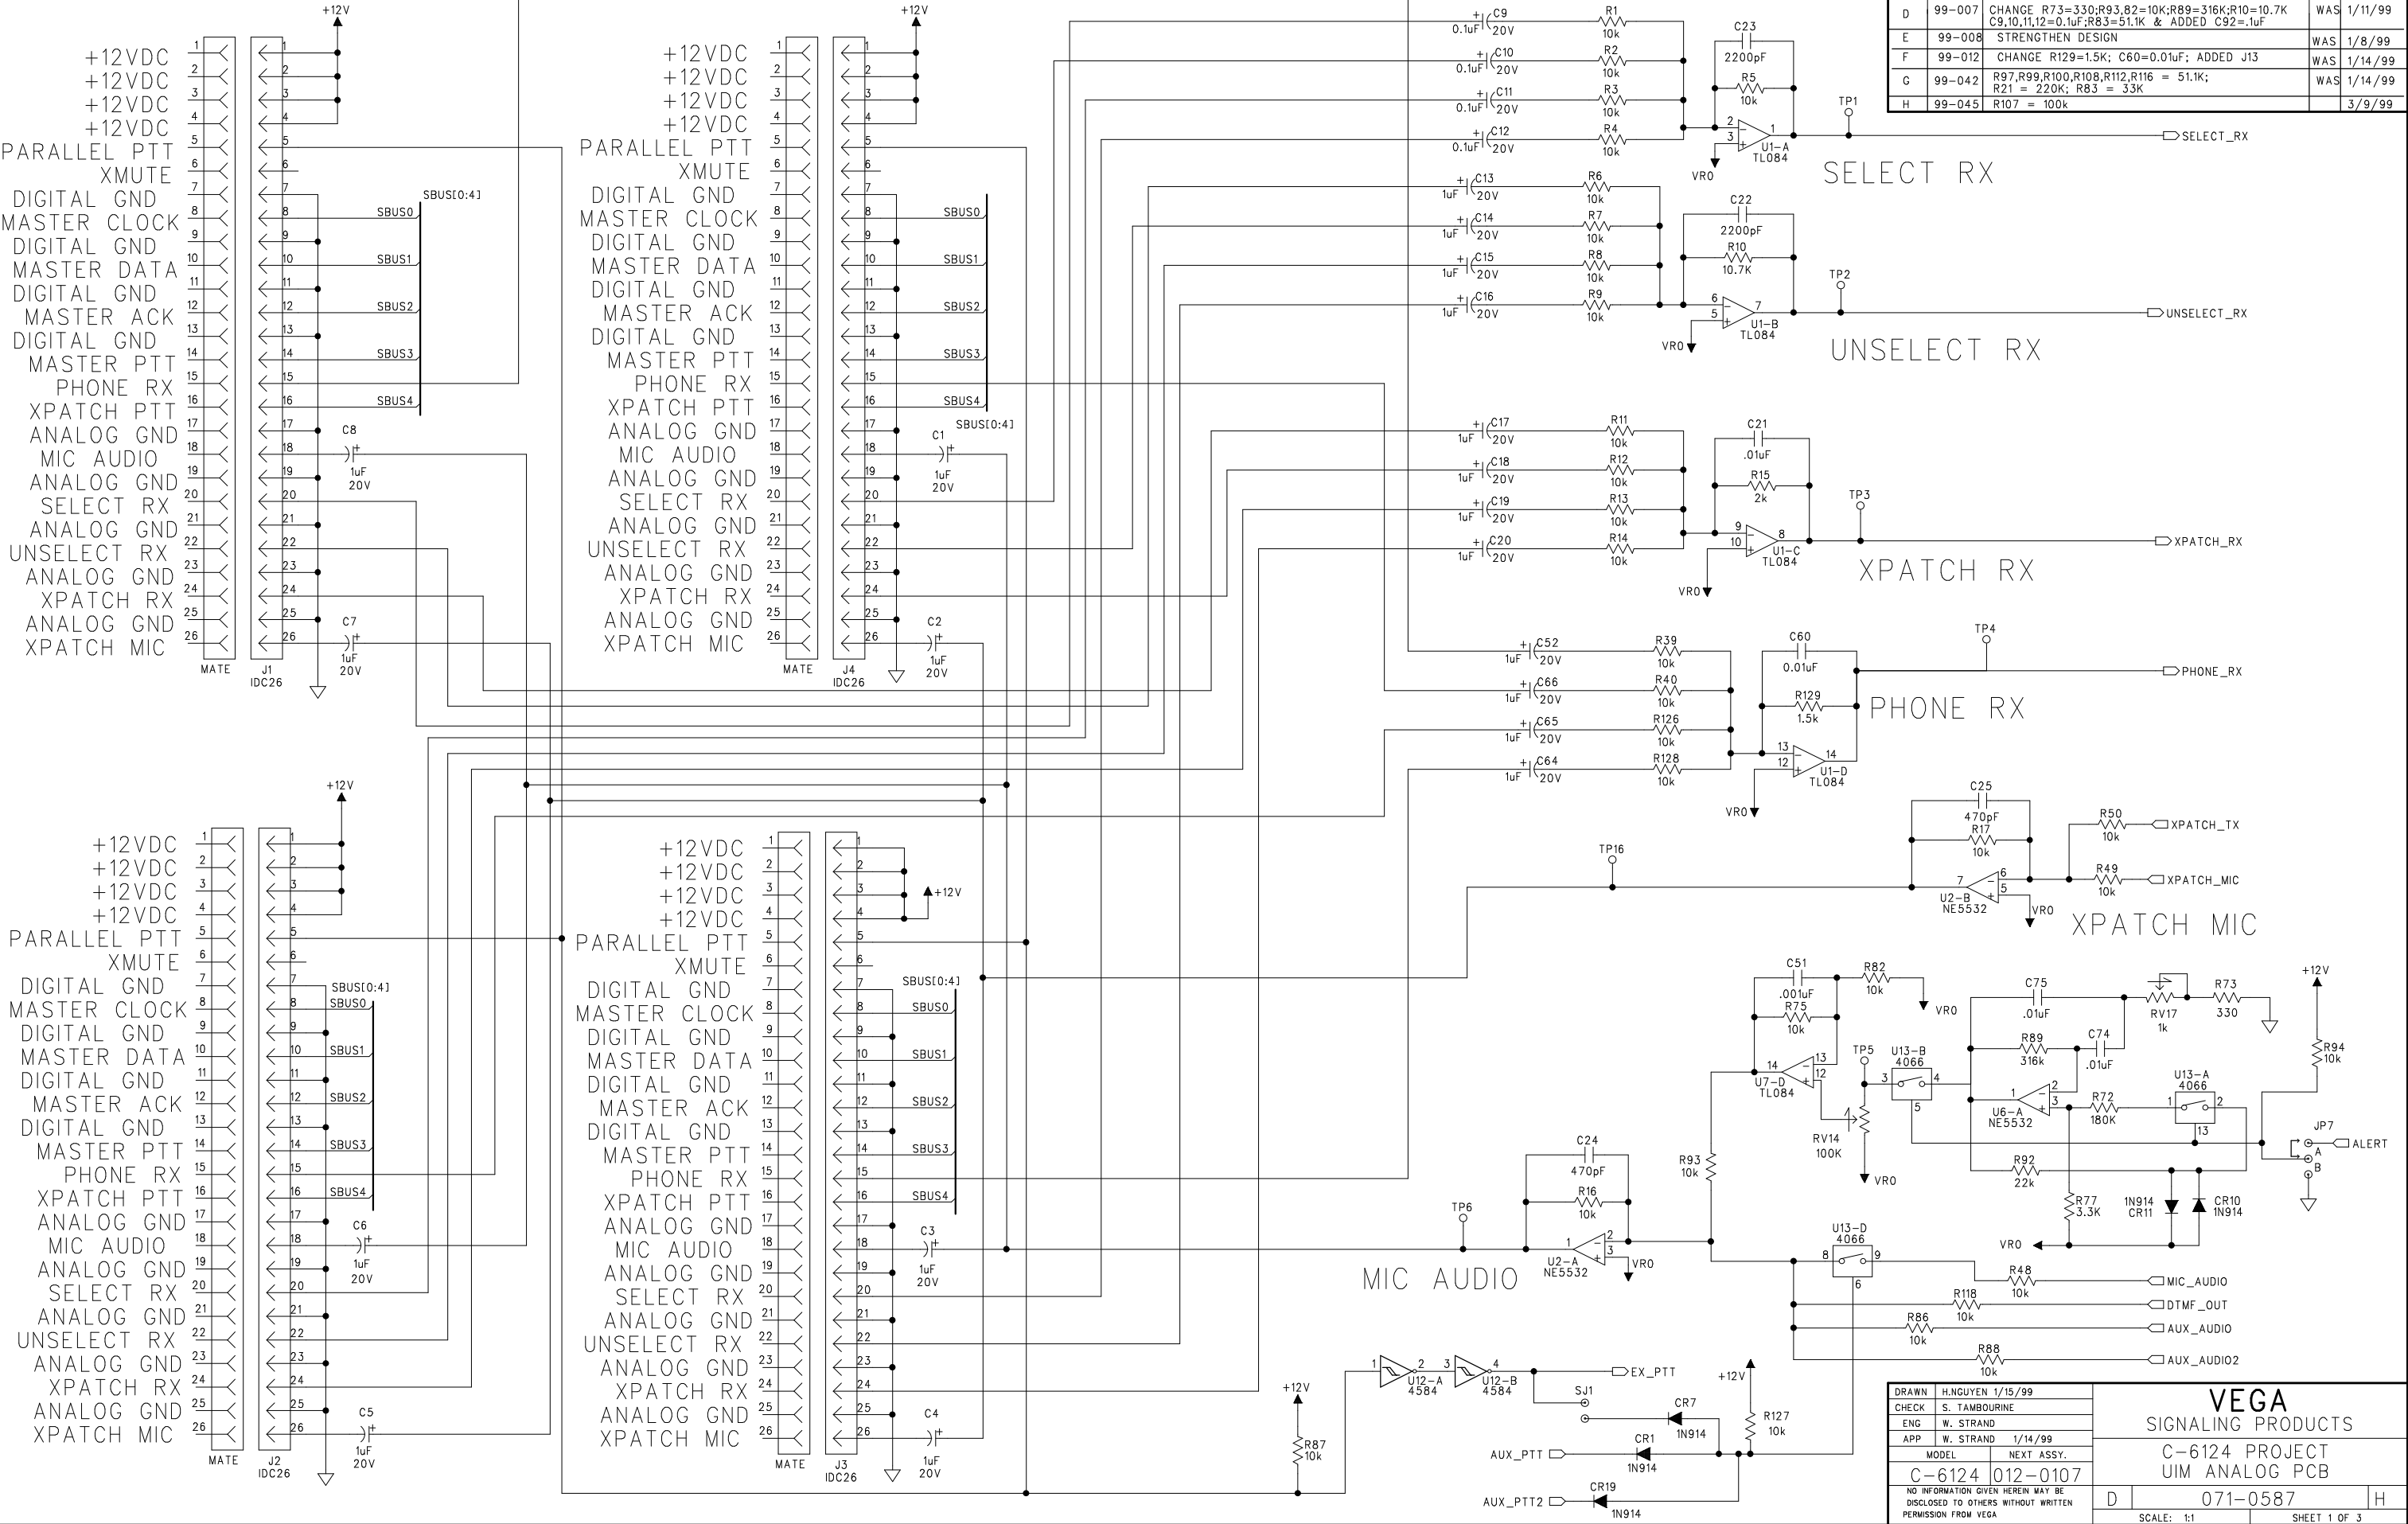

REVISIONS				
SYM	ACT#	DESCRIPTION	APP	DATE
		SEE PAGE 1 FOR HISTORY		

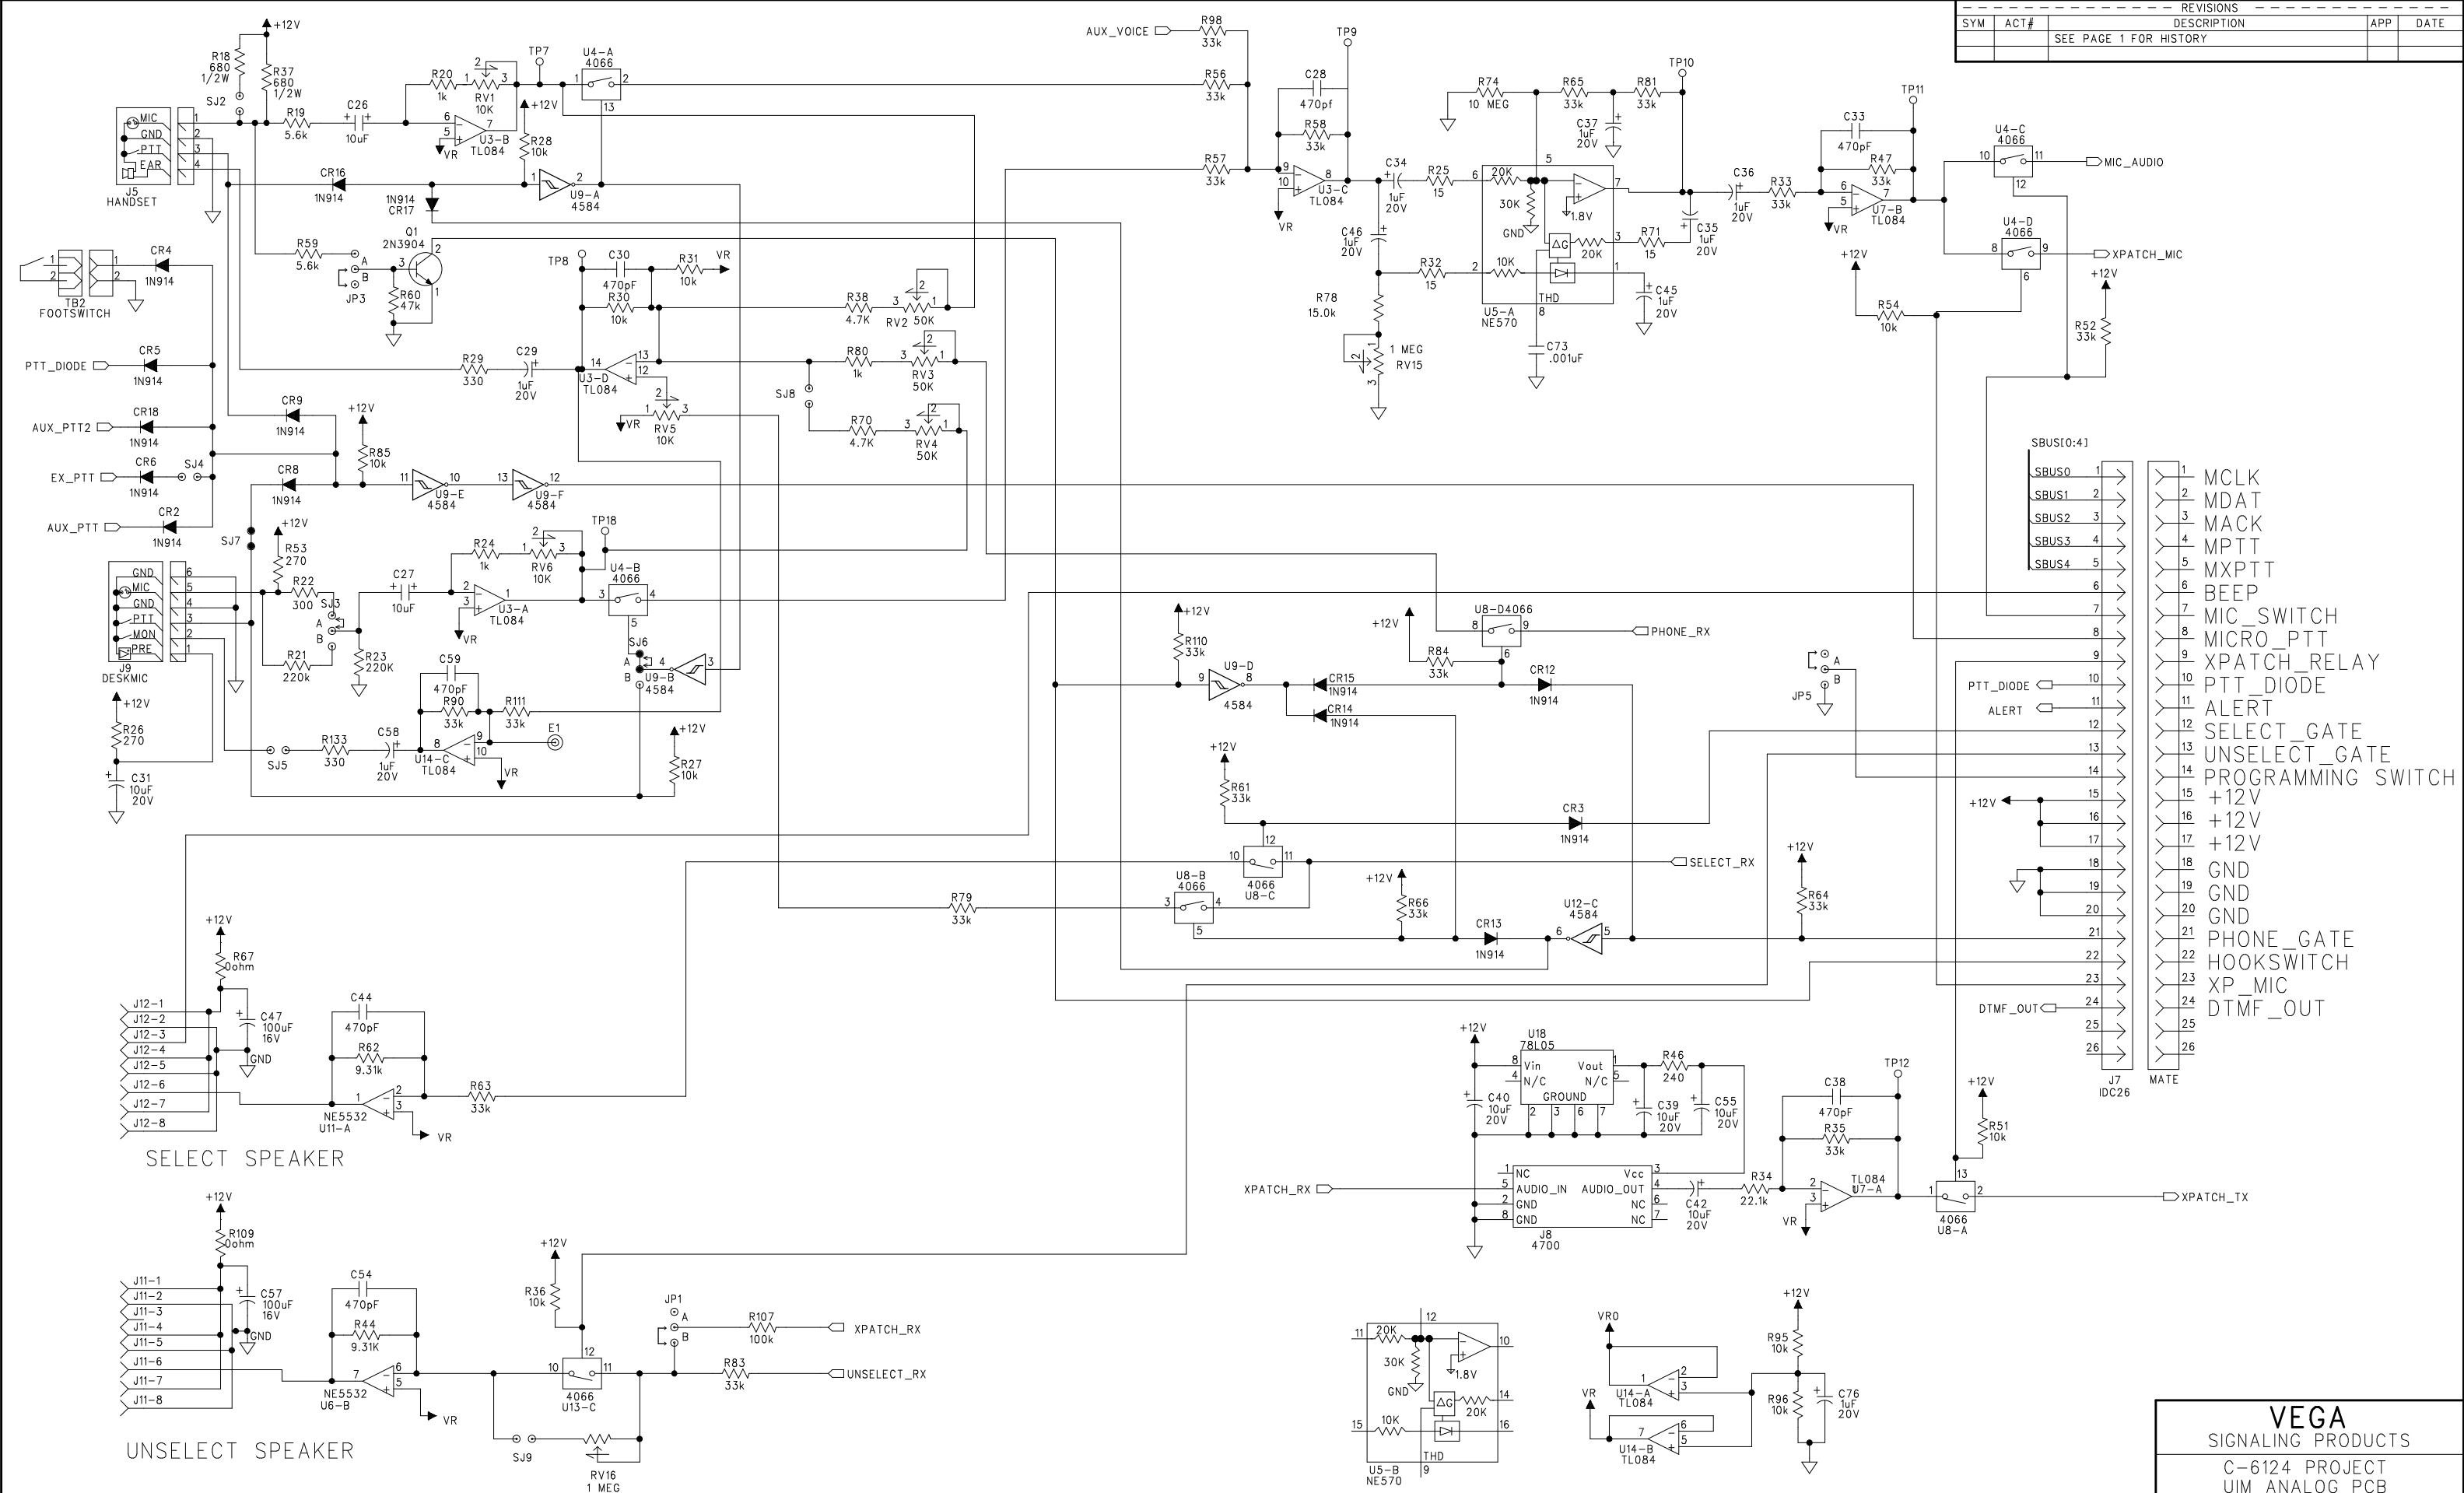


NOTE: REMOVE R53 WHEN USING A DYNAMIC MICROPHONE

VEGA		
SIGNALING PRODUCTS		
C-6124 PROJECT		
UIM ANALOG PCB		
D	071-0587	H
SCALE: 1:1		SHEET 2 OF 3



REVISIONS				
SYM	ACT#	DESCRIPTION		APP
		SEE PAGE 1 FOR HISTORY		DATE

JUMPER SETTINGS




JP1=A:XPATCH AUDIO NOT SUMMED TO UNSEL SPK
JP1=B:XPATCH AUDIO SUMMED TO UNSEL SPK
JP2=A:AUX SPK OUTPUT WITH UNSEL RECEIVE AUDIO
JP2=B:AUX SPK OUTPUT WITHOUT UNSEL RECEIVE AUDIO
JP3=A:HANDSET/DESKMIC
JP3=B:DESKMIC ONLY
JP4=A:RECORDER OUTPUT WITH UNSEL RECEIVE AUDIO
JP4=B:RECORDER OUTPUT WITHOUT UNSEL RECEIVE AUDIO
JP5=A:NORMAL OPERATION
JP5=B:PROGRAMMING MODE
JP6=A:SIGNAL IS NOT MODIFIED
JP6=B:SIGNAL IS ROUTED THRU ALC & NOTCH
JP7=A:NORMAL OPERATION
JP7=B:ENCODER DISABLED

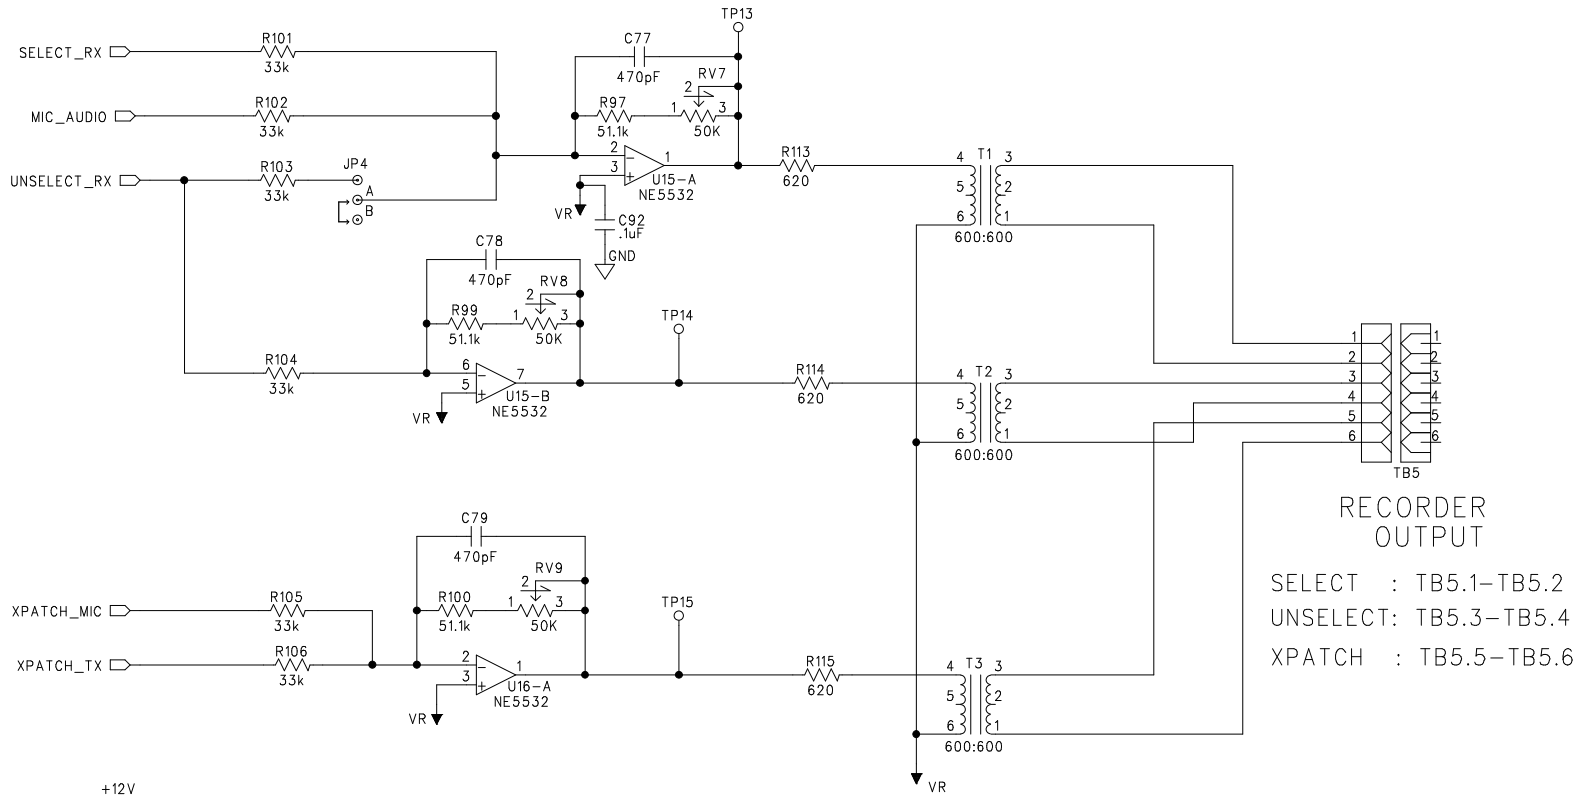

RECORDER OUTPUT
SELECT : TB5.1-TB5.2
UNSELECT: TB5.3-TB5.4
XPATCH : TB5.5-TB5.6

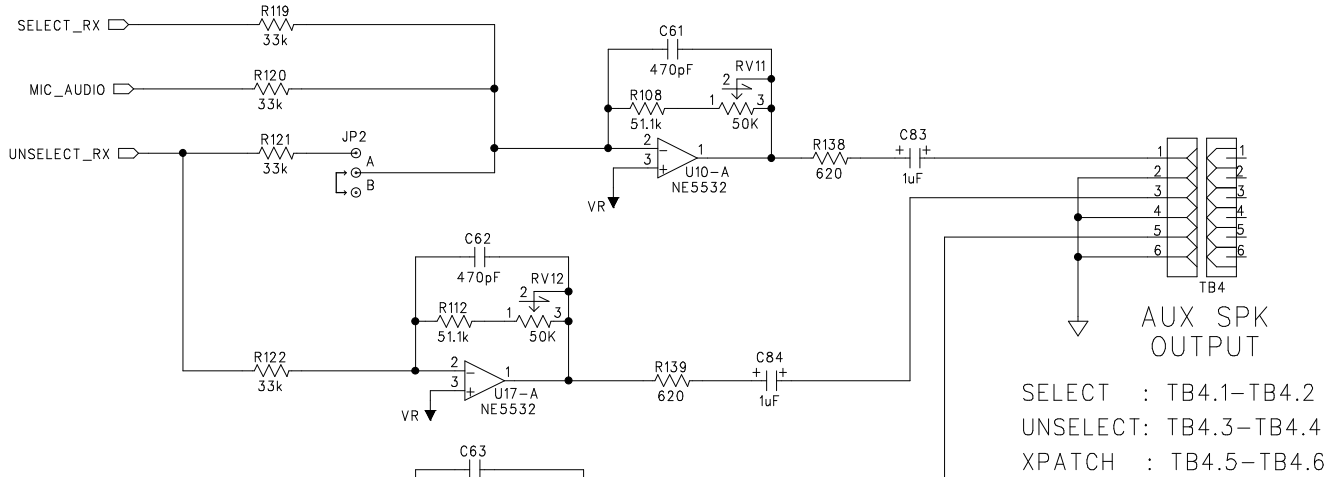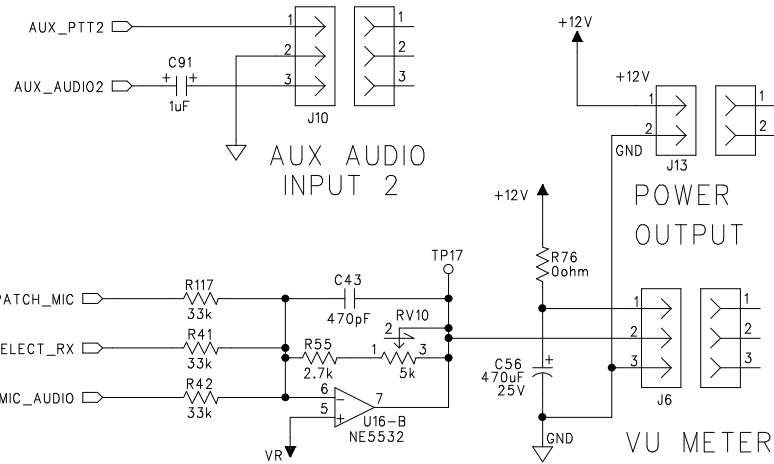

AUX SPK OUTPUT
SELECT : TB4.1-TB4.2
UNSELECT: TB4.3-TB4.4
XPATCH : TB4.5-TB4.6

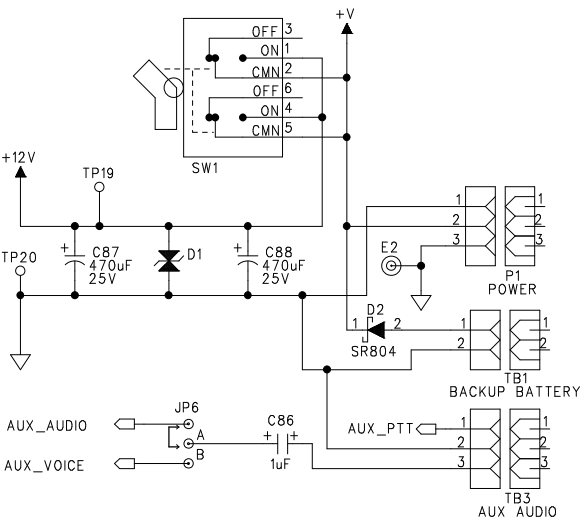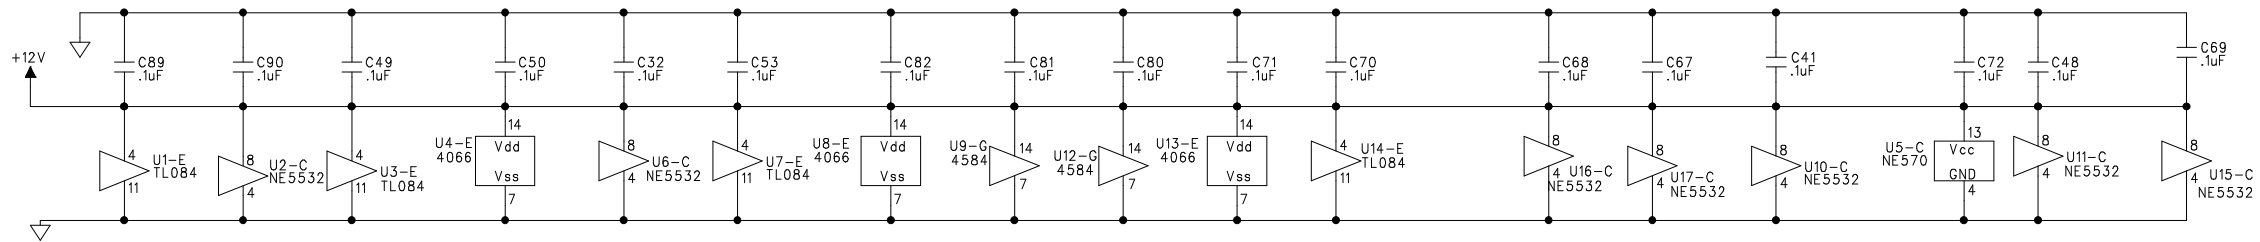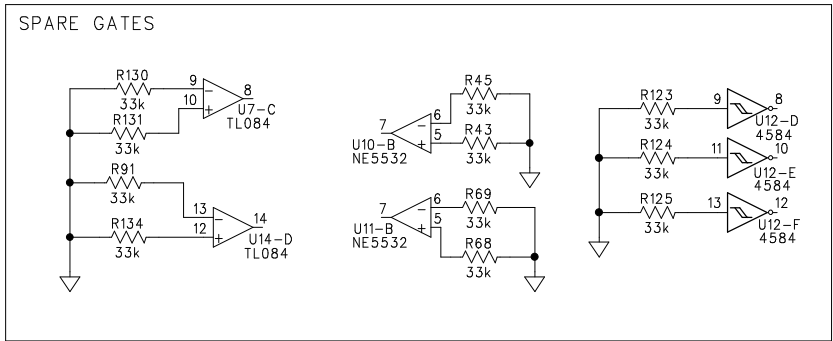

VEGA		
SIGNALING PRODUCTS		
C-6124		
UIM ANALOG PCB		
D	071-0587	H
SCALE: 1:1		SHEET 3 OF 3