




PAP-32

Program IFB Assignment Panel

Features

The PAP-32 provides the user with the ability to assign multiple program sources to over sixteen different IFB destinations. Through the use of standard EKP-32 expansion panels, the PAP-32 can be extended to up to 64 program sources and 64 IFB destinations. The PAP-32 works with ADAM, ADAM-CS, Cronus and Zeus intercom matrix systems.

Line Drawing

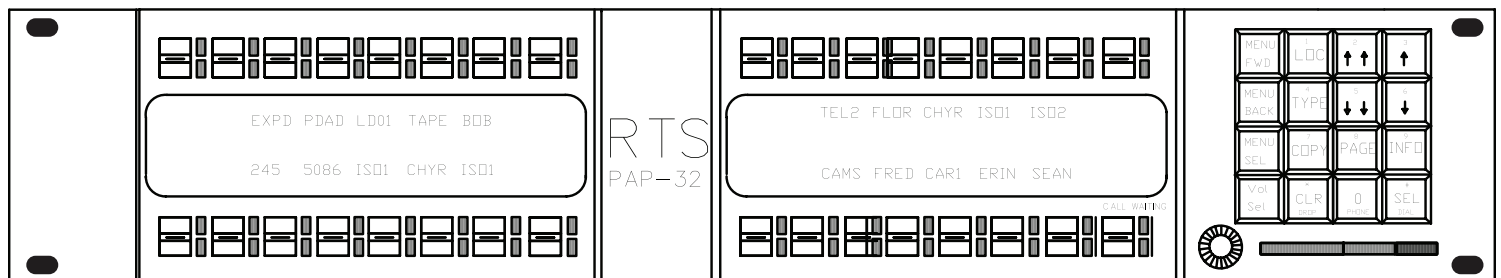

PAP-32 Specifications

Matrix Connectors

DB-9S Female

RJ-12 Female

Power Requirements

100-240VAC, 50/60 Hz, 1A

Environmental

Operating Temperature

0°C to 50°C

Storage Temperature

-20°C to 75°C

Humidity (Operating & Storage):

0 to 95%, non-condensing

Dimensions

3.44" (88 mm) high

19" (483 mm) wide

3.5" (89 mm) deep

Weight

5.5 lbs. (2.5 kg)

Finish

Thermoplastic front panel, aluminum case and rear panel, light gray finish

Contact Information

Telex Communications, Inc.
12000 Portland Avenue South
Burnsville, Minnesota 55337
Telephone: 877-863-4169
Fax: 800-955-6831

Form Number: 38110-070

Date: April, 2006

Ordering Information

PAP-32LK

Program IFB assignment panel

Catalog Number: 90007704000

PAP-32PB

Program IFB assignment panel

Catalog Number: 90007704001

This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.