

Overview

These instructions are intended for a customer possessing a Telex IP-3008 or IP-3018 and has purchased an upgrade license to enable new features for their device.

Along with these instructions, you should receive a USB drive containing a single license file. The license file is named ResponseRequest_XXXXXXXXXXXXX.bin (where the Xs match the target device's MAC address).


Requirements

- IP-3008 or IP-3018
- Telex System Manager version 3.000 or newer.

Steps


To **upgrade the IP-30XX license**, do the following:

1. Launch **Telex System Manager**.
TSM launches and automatically detects all Telex devices on the network, including the desired IP-30XX device.
2. Select the appropriate **IP-30XX device**.

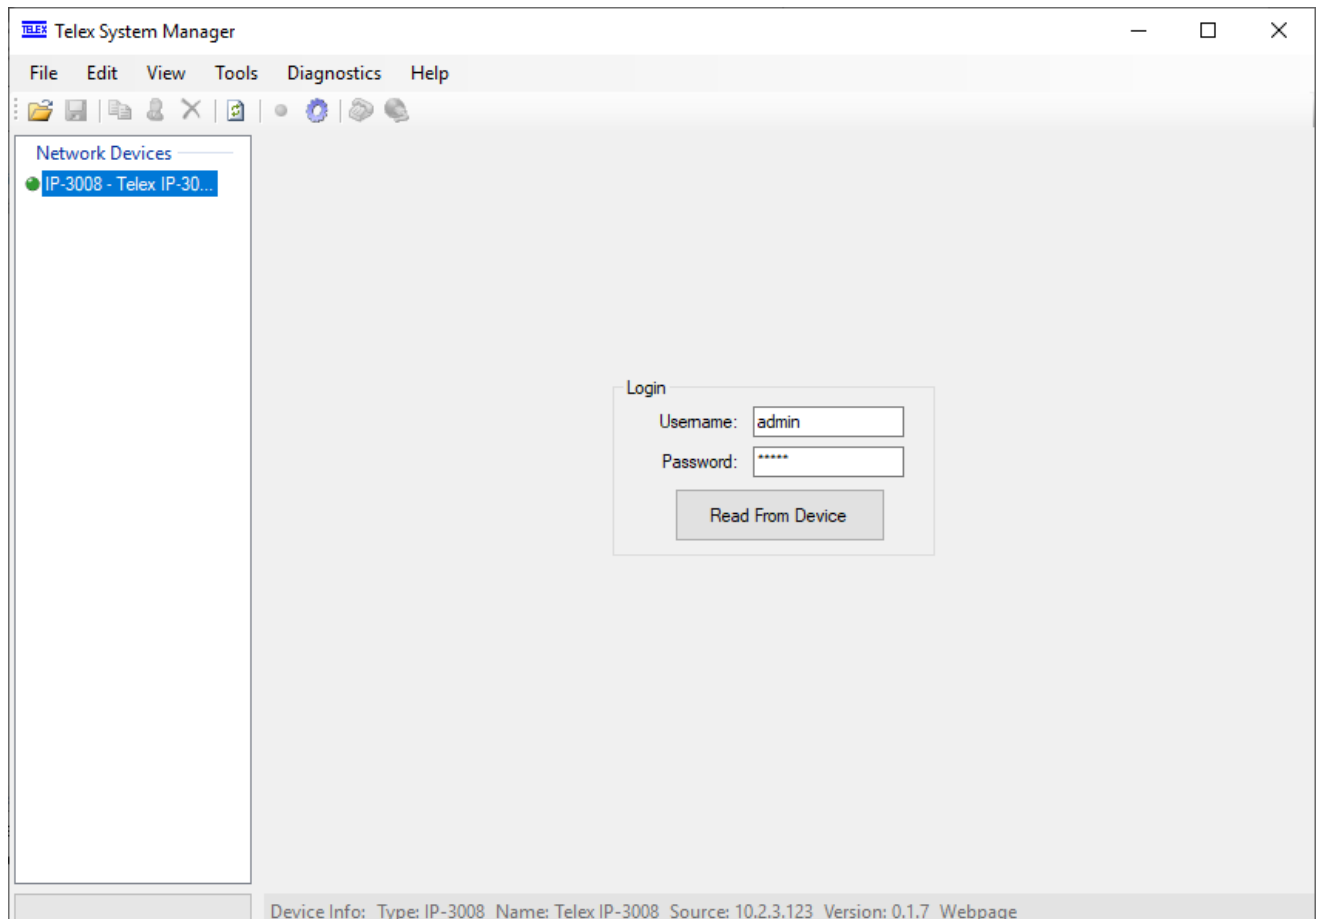

3. Enter the **username** and **password**.

4. Click the **Read From Device** button.
TSM reads the IP-30XX configuration and design, and populates the information on each corresponding tab.
5. Select the **Licensing** tab.

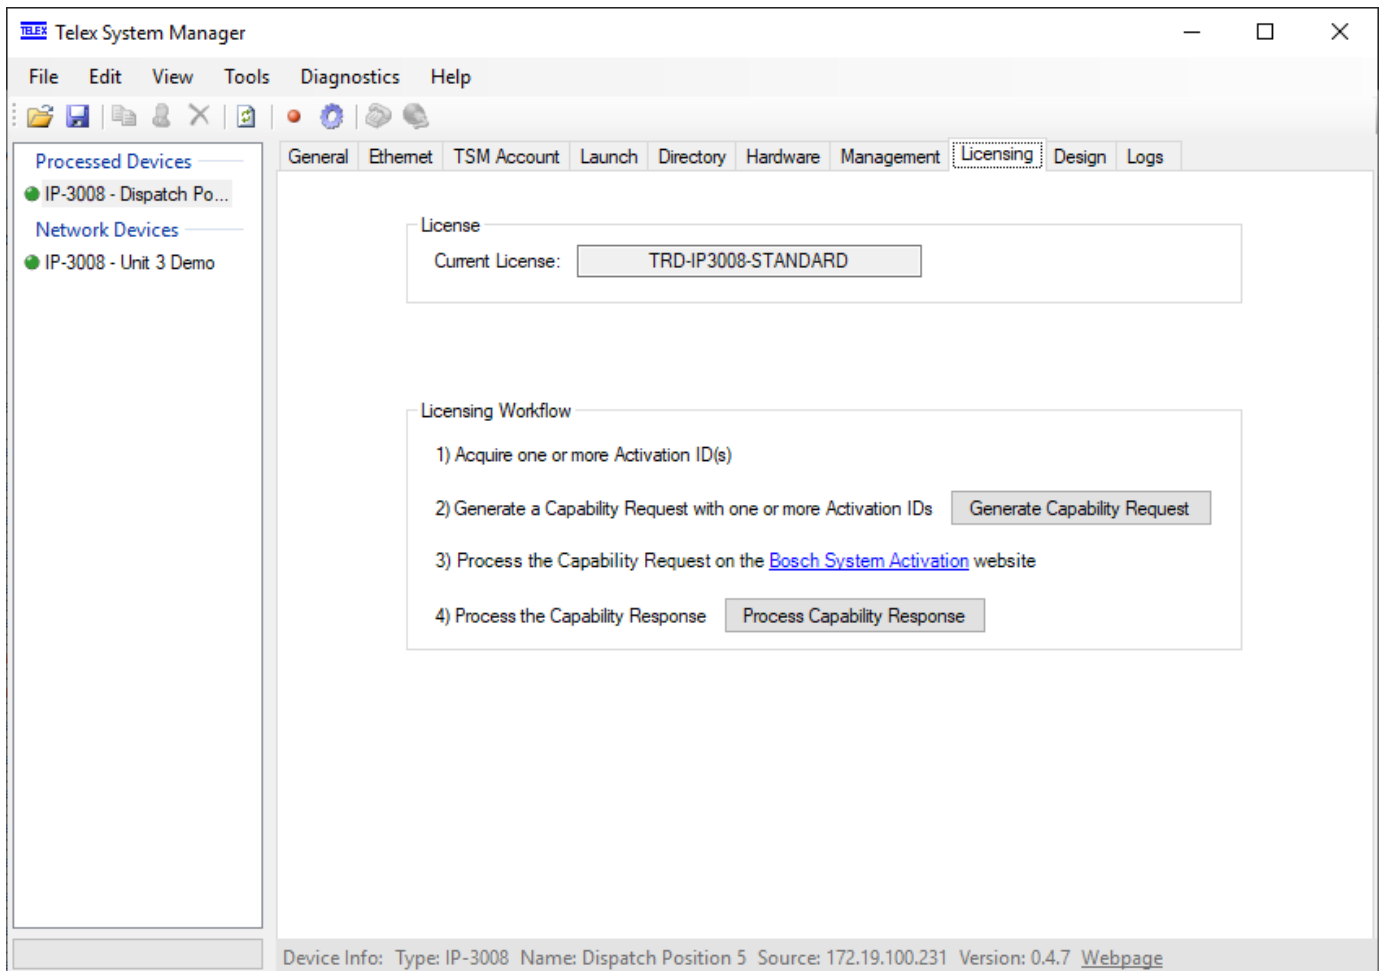

6. Insert the **USB drive** to the computer running TSM.
7. In TSM, click the **Process Capability Response** button.
8. Click the **Open File** button.
9. Select the **ResponseRequest_XXXXXXXXXXXXX.bin** file from the USB drive folder.
10. Click the **Process Capability Response** button.
The Status text box displays feedback information from the device.
If successful, the IP-30XX Console Software restarts using the new license. The license is upgraded and the newly licensed features are available.
11. If desired, reread the device's configuration in TSM and ensure the newly purchased license displays properly in the Licensing | Current License field.