

## Technical Data Sheet

Innovating the Future of Global Communications

# TIF-4000 Telephone Interface




The TIF-4000 is a frame of up to 12 digital telephone interface cards (TIF-4000 front card), with a redundant power supply. The TIF-4000 is designed to be compatible with ADAM, ADAM-M, and Zeus intercom systems. It provides bidirectional communication between the intercom matrix and an analog telephone line. It allows the phone to access all crosspoints of the matrix, as well as dynamic party lines, IFB circuits, and other forms of communications. The 4 RU high mountable TIF-4000 provides a transparent link to the telephone system enabling full dial-out capability from any designated keypanel with keypad. The TIF-4000 has full dial-in capability giving the caller a keypanel on the system via commands from the DTMF pad on their telephone.


### **Features**

- · Redundant power supply
- 12-card TIF frame in a 4 RU space
- · Auto or manual answer
- · Select security code or none

- · Select number of rings before answer
- Caller can be locked to one (1) matrix point
- Up to 16 panels may be selected to ring
- · Call in directly to party line or IFB

## Line Drawing

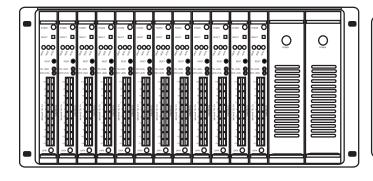

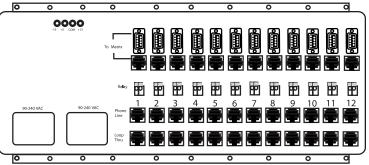

## **Specifications**

Matrix Input/Output: 0 dBu to +20dBu Telephone Input/Output: -30dBu to +6dBu Noise (200Hz to 3.8kHz): -40dBu or less

#### Harmonic Distortion (300Hz to 3.8kHz)

Intercom Side: -30dBu or less Telephone Side: -25dBu or less

Frequency Response: 300Hz to 3.8kHz +0 dB, -6dB Matrix Connectors: DB-9 Female; RJ-11 Female

Telephone Line Connector: RJ-11

Telephone Loop-Thru Connector: RJ-11

#### **Power Requirements**

Universal Power Supply: 100-240VAC, 50/60Hz

#### **Power Dissipation**

TIF-4000 Full Frame (12 TIF Cards): 750mA @ -15V; 1A @ +15V; 9A @ +5V TIF-4000 Individual Card: 60mA @ -15V; 70mA @ +15V; 750mA @ +5V

#### **Environmental**

Operating Temperature: -20°C to 50°C (-4°F to 122°F) Storage Temperature: -30°C to 70°C (-22°F to 158°F)

Dimensions:

19" W x 6.97" H x 12.8" D (25mm W x 177mm H x 325mm D)

Weight: 28.45lbs. (12.9kg)

## Order Information

TIF-4000-PI • TIF-4000 Frame • Telephone Interface 90207818000 • TIF-4000 Card • Front Card

The specification information is preliminary and is subject to change without notification. Brand names mentioned are the property of their respective companies.

Date: August 2011

Bosch Security Systems, Inc. | 12000 Portland Avenue South | Burnsville, Minnesota 55337 Telephone: 877·863·4169 | Fax: (800) 323-0498 Form Number: F.01U.247.122 Rev 03

