




## UIO-256

### 16 Input/16 Output GPI Interface

#### Features

Each UIO-256 provides 16 GPI inputs and 16 GPI outputs. The GPI inputs can be set up as remotely controlled keypanel keys to activate intercom ports, party lines, GPI outputs, etc. within the intercom system. The GPI outputs are typically assigned for activation from keypanel keys. They can be used to control lighting or to key remote transmitters, paging systems, etc. Relays can be assigned to keys via AZedit.

#### Line Drawing

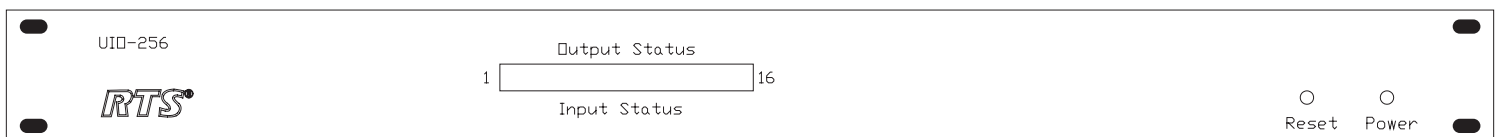

# UIO-256 Specifications

## Power

90/230 VAC  $\pm 10\%$ , 50/60 Hz (selectable via back panel)

## Dimensions

1 RU High x 7" (178mm) deep behind front panel

## Weight

7.4 lbs (3.36 kg)

## GPI Inputs

Type: Optically coupled

Input Requirements: 5-18 VDC

## GPI Outputs

Type: DPDT Relays with common, normal-open and normal -closed contacts

Contact Ratings: 0.5A at 120 VAC; 1A at 24 VDC; 0.3A at 60 VDC

---

### Contact Information

Telex Communications, Inc.  
12000 Portland Avenue South  
Burnsville, Minnesota 55337  
Telephone: 877-863-4169  
Fax: 800-955-6831

Form Number: LIT000036000 Rev A  
Date: April, 2006

---

### Ordering Information

**UIO-256**  
16 Input/16 output GPI interface  
Catalog Number: 90007499000

This specifications information is preliminary and is subject to change without notification.  
Brand names mentioned are the property of their respective companies.